


Emergency kits LED emergency backup driver

Suitable for lights up to 60 watts, such as down lights, panel lights, tri-proof lights, etc.

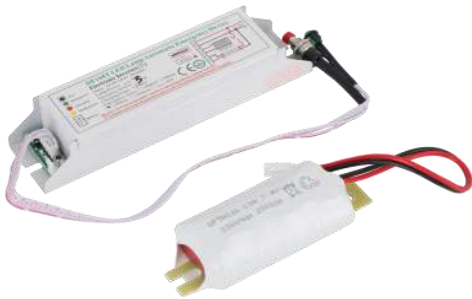

Model No.: SL-EM-60-8W

Input Voltage: AC90-265V/50-60Hz

Output Voltage: DC18-60V

Emergency Power: 8W

Emergency Time: 120 minutes

Charging Time: 24 hours

Battery: Li-ion battery 7.4V 2500mAh

Battery Dimension: 95*38*22mm

Inverter Dimension: 137*34*26mm

Operating Temp: -10°C to 50°C

IP Rating: IP20

Certificates: CE ROHS

Warranty: 2 Years

Suitable for lights up to 20 watts, such as tube lights, down lights.



Model No.: SL-EM-18-18W

Input Voltage: AC90-265V/50-60Hz

Output Voltage: AC90-265V, DC90-265V

Emergency Power: 18W

Emergency Time: 120 minutes

Charging Time: 24 hours

Battery: Li-ion battery 11.1V 4400mAh

Battery Dimension: 240*36*20mm

Inverter Dimension: 138*38*28mm

Operating Temp: -10°C to 50°C

IP Rating: IP20

Certificates: CE ROHS

Warranty: 2 Years

Suitable for lights up to 200 watts, such as high bay lights, flood lights, wallpack.



Model No.: SL-EM-200-15W

Input Voltage: AC90-265V/50-60Hz

Output Voltage: DC18-150V

Emergency Power: 15W

Emergency Time: 120 minutes

Charging Time: 24 hours

Battery: Li-ion battery 11.1V 4000mAh

Product Dimension: 240*150*75mm

Operating Temp: -10°C to 50°C

IP Rating: IP65

Certificates: CE ROHS

Warranty: 2 Years