



Make the best sign tube,

Offer the best sign solution

## FLEXIBLE LED WALL WASHER

SIGNLITE OPTO-ELECTRONICS CO.,LTD

Core products

Sign tube | Strip | Module | Neon

www.signliteled.com

Tel:0755-29518916

E-mail:sales@signlite.com.cn

Mobile/whatsapp/wechat:+86 15814478470



Scan QR Code


MAKE YOUR ILLUMINATED SIGNS BRIGHTER AND EVENER



**Free Bend Flexible  
Blazer 2.0 Wallwasher LED Strip**

## Blazer 2.0 Wallwasher LED Strip


- Can be bent vertically and horizontally;
- 10\*60° / 20\*30° / 45° Lens for multiple angles;
- High light effect 3535 LED can be white light / DMX RGBW version;
- Using constant current IC design, IP67 waterproof;
- Complete clip accessories, bracket, aluminum channel, flexible bracket, outdoor special equipment and rotatable;
- Bending and twisting more gentle, smaller volume, large volume, light weight;
- Soft bend flexibility, strong impact resistant, high tear resistance and high weather resistance;
- 50,000 hours of life with a 5-year warranty.

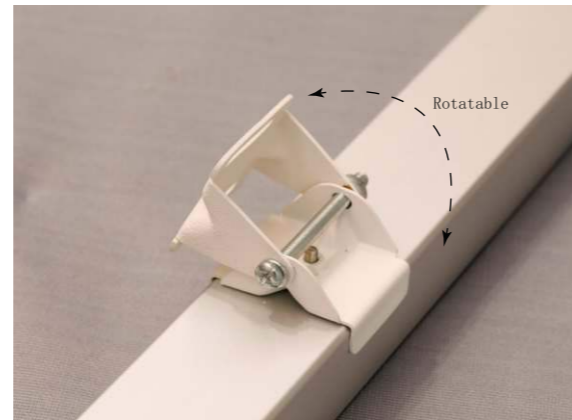

## Luminous effect


### 20\*30°

20\*30 beam angle lens  
recommend distance from wall: 0.5M  
Light concentration, High lighting distance

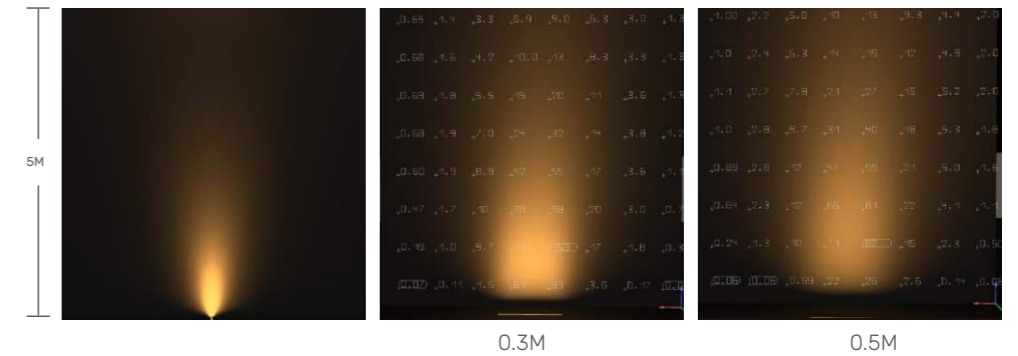


### 10\*60°

10\*60 beam angle lens  
recommend distance from wall: 0.5M  
larger luminous surface, High lighting distance

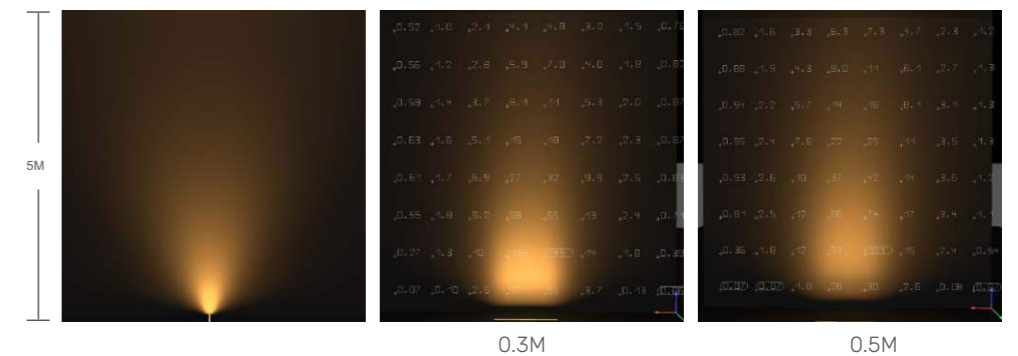

### 45°



45 degree beam angle lens  
recommend distance from wall: 0.5M  
larger luminous surface

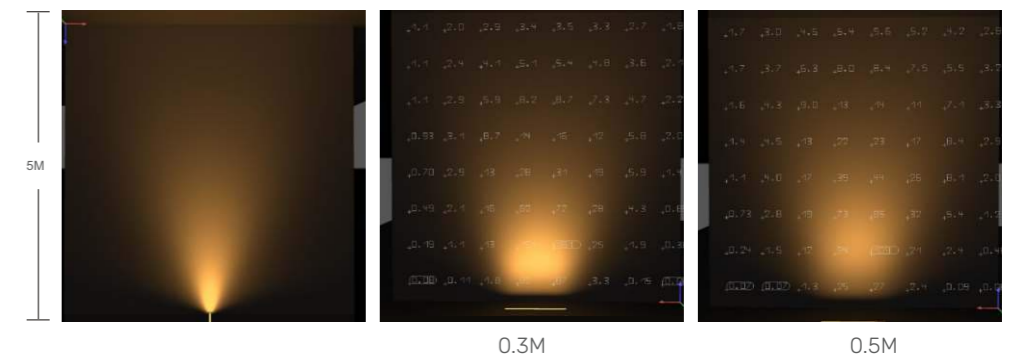





## ELECTRICAL WIRING COLOR CODES



## Application

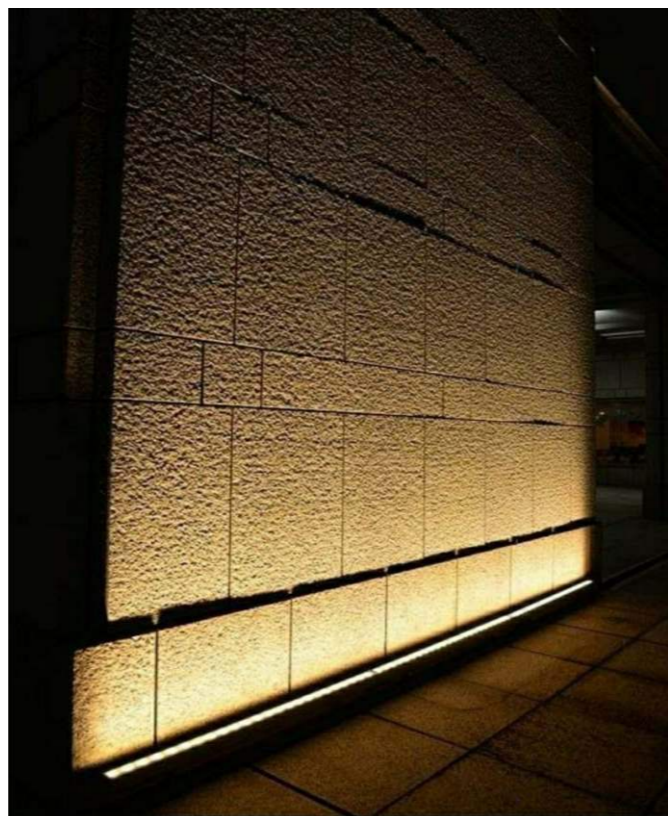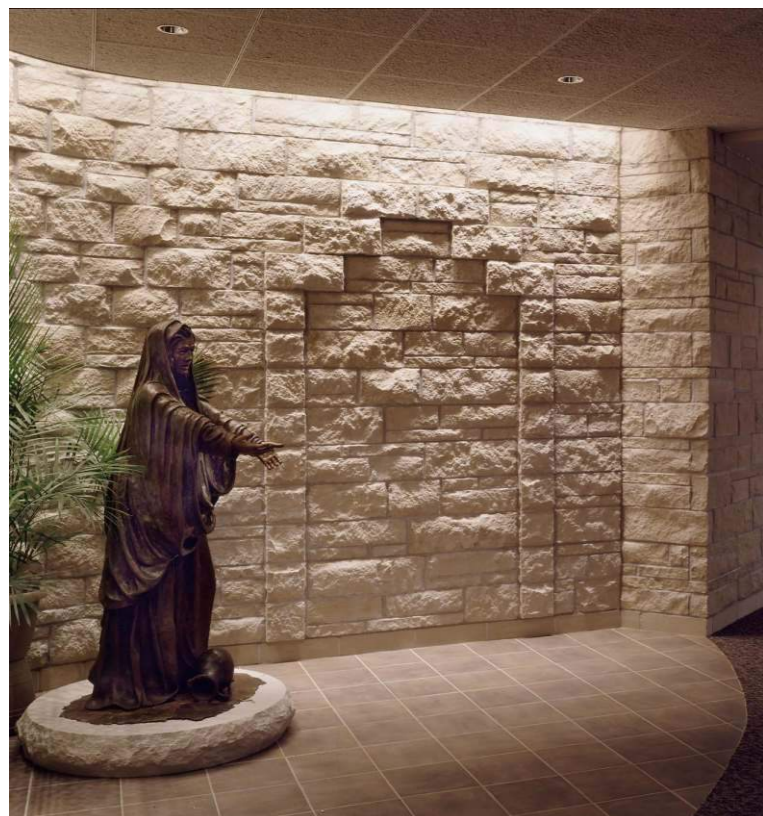

## Application

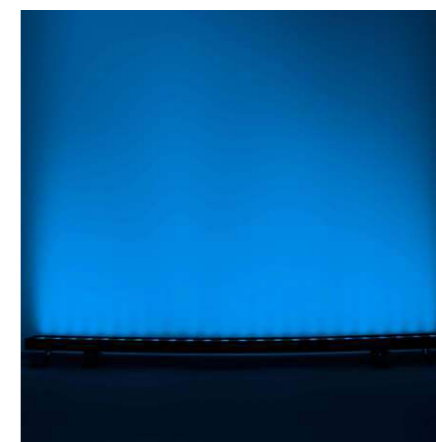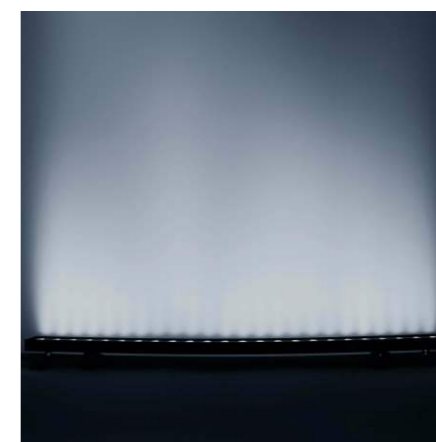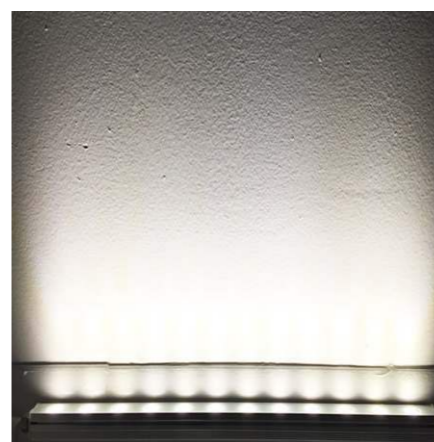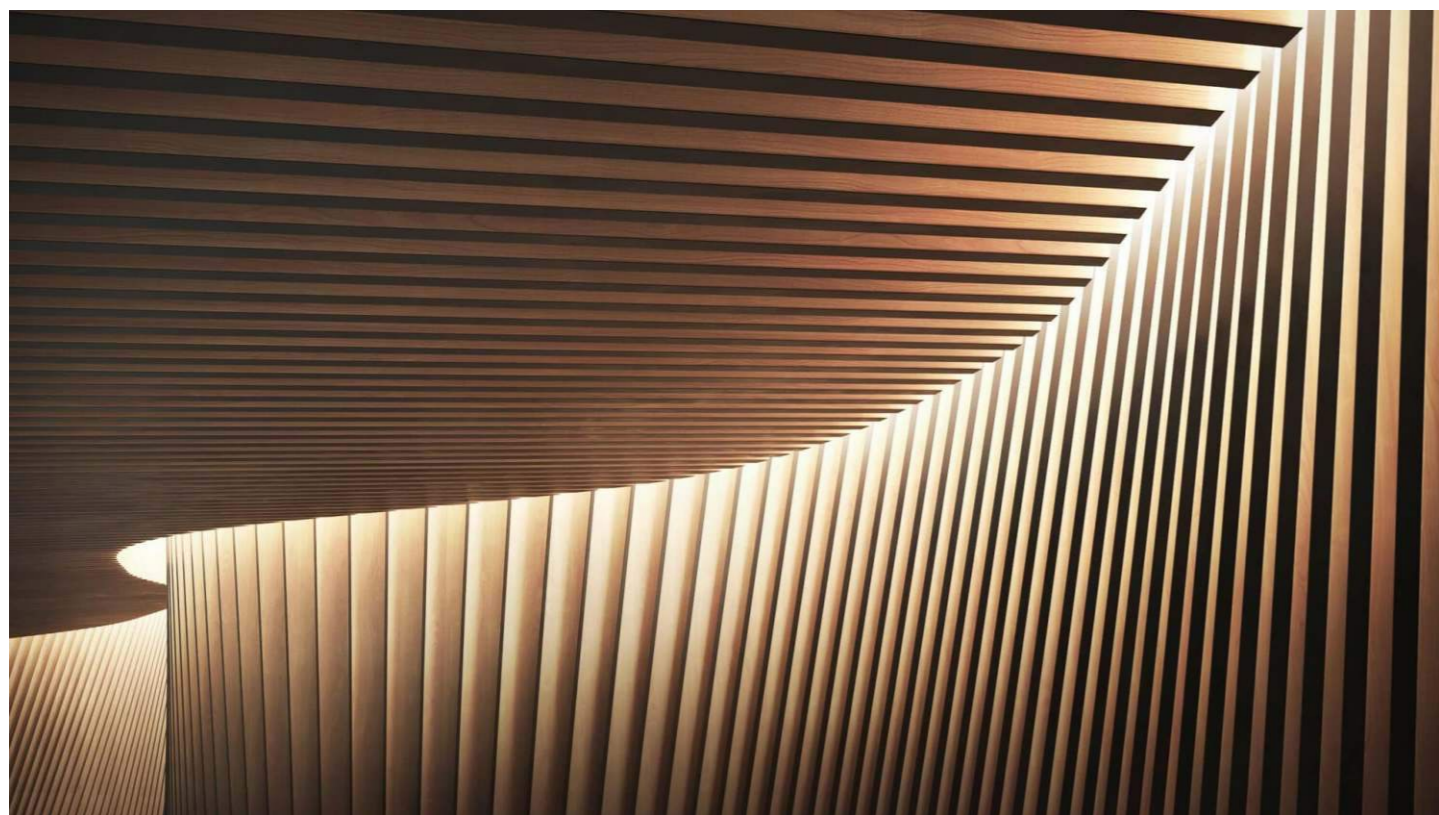



**Flex LED Wall Washer**


**WOX2010E18C**

## Top Bend Flex LED Wall Washer (WOX2010E18C)

- Available colors:
  - (1)2700-6000K: min cutting length 125mm(6LEDs);
  - (2)RGB, RGBW, RGB DMX: min cutting length 166.7mm(6LEDs or 7LEDs);
- Optional aluminum profile kit, included: Aluminum profile,angle adjustable brackets.
- LED Quantity: 48 pcs/m (white), 42pcs/m(RGB, RGBW) or 36pcs/m(RGB DMX512)
- CRI: Ra>90 (for 2700-6000K only)
- 24VDC working and max 18W/meter(white color).
- Up to 120LM/W for 4000K.
- Maximum 5meters per continuous run length.
- Wall washing project Lighting height up to 4meters.
- 3M adhesive tape on back.
- IP67 rated.
- 3 Years warranty.




## Product Dimension

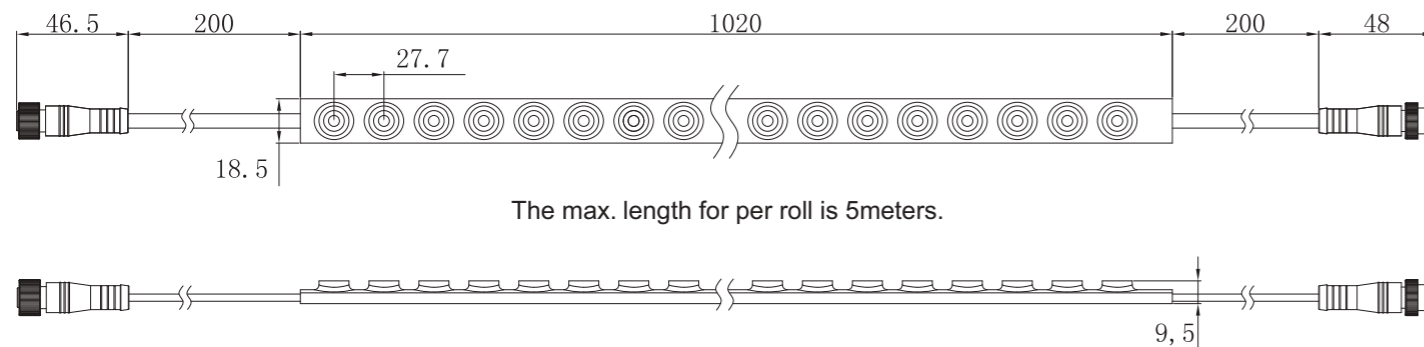

## Luminous effect


### 20\*30°

20\*30 beam angle lens  
recommend distance from wall:0.5M  
Light concentration,High lighting distance

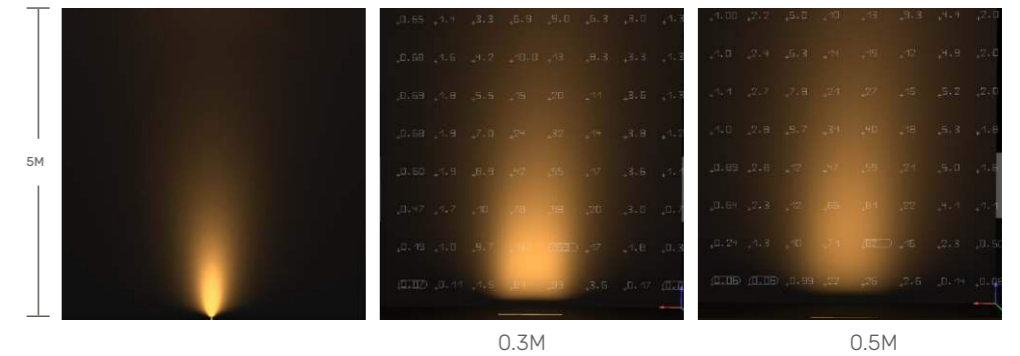


### 10\*60°

10\*60 beam angle lens  
recommend distance from wall:0.5M  
larger luminous surface,High lighting distance

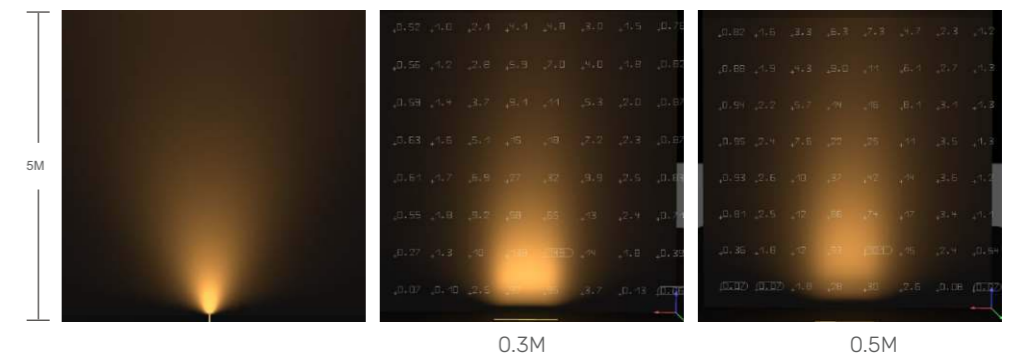

### 45°


45 degree beam angle lens  
recommend distance from wall:0.5M  
larger luminous surface

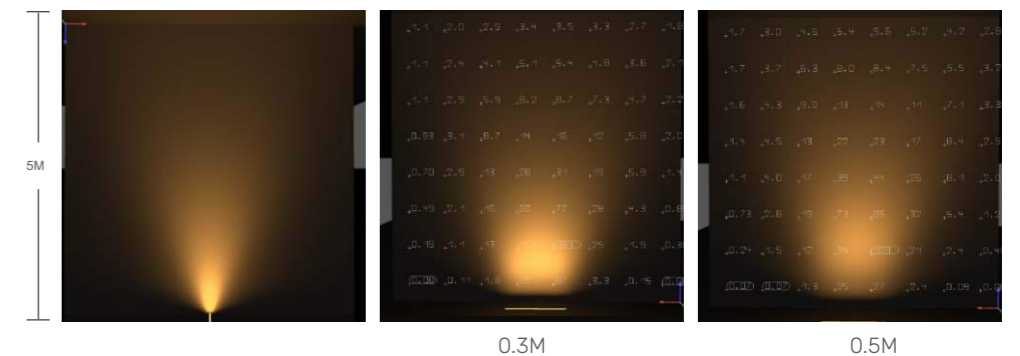

## ELECTRICAL WIRING COLOR CODES

● MONOCOLOR	Red: V+ Black: GND	Red Black	○ RGB	Red: V+ White: C Yellow: W	Yellow Red White
○ SPI	Red: V+ Yellow: DAT White: GND	Yellow Red White	○ RGB	Black: V+ Red: R Green: G Blue: B	Black Green Red Blue
○ RGBW	Black: V+ Red: R Green: G Blue: B White: W	Black Green Red Blue White	○ RGB CCT	Black: V+ Red: R Green: G Blue: B White: C Yellow: W	Black Green Red Blue White Yellow
● DMX	Black: GND White: PI/PO Blue: A Green: B Red: V+	Black Green Red White			

## Application

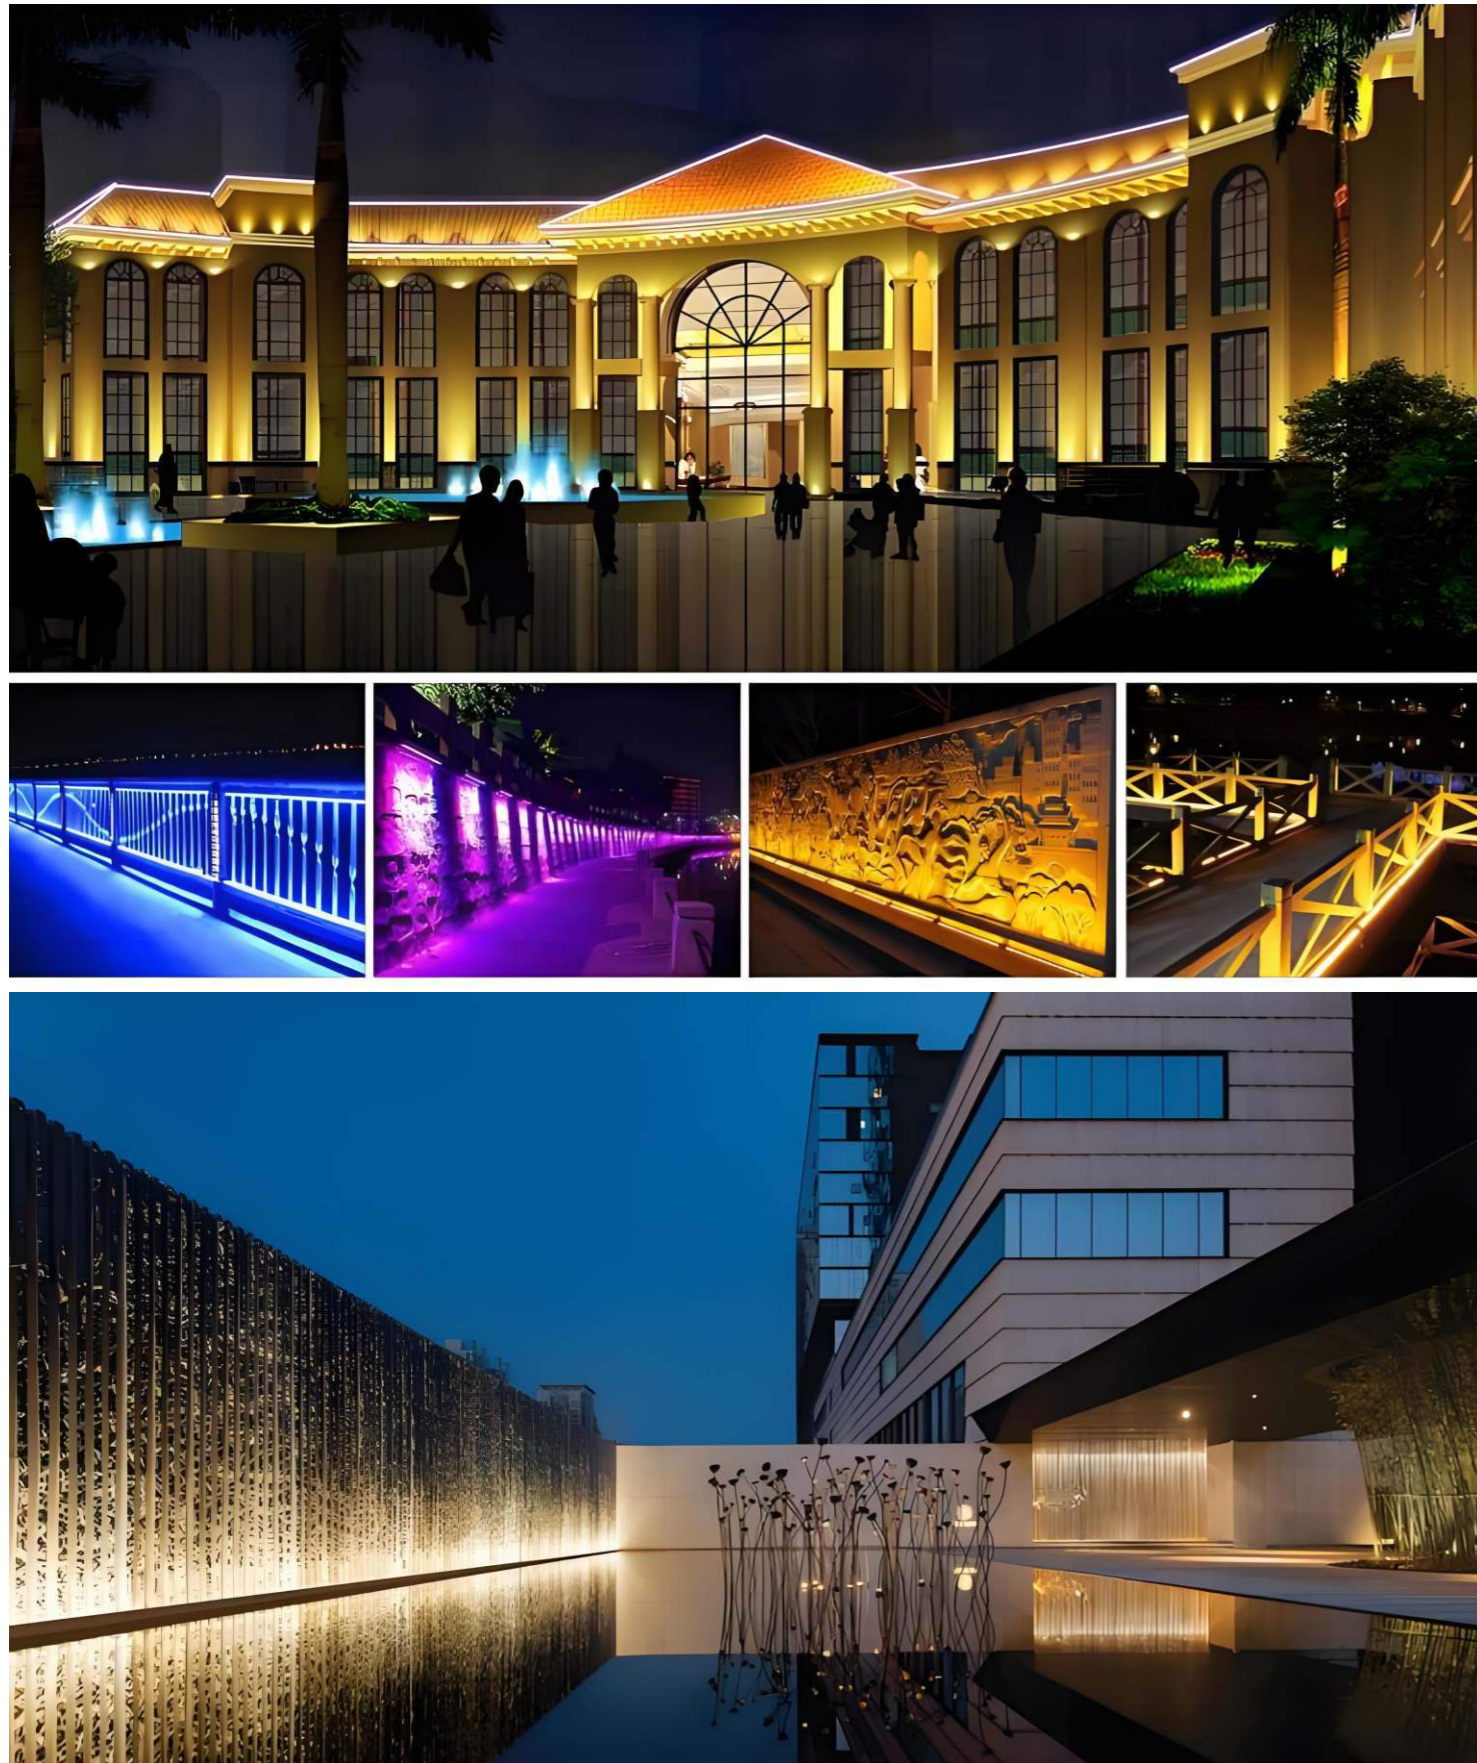

## Application

